


## **J RIVET RACKING**



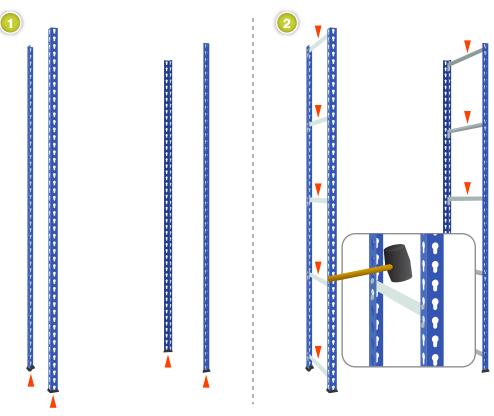




Attach front and back beams to the frames at the same positions as side beams and secure with a rubber mallet.

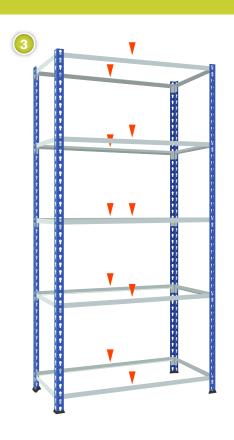

J RIVET Loads and Capacities			
Shelf Pitch	Bay Load	Length	Load
305mm	2500kgs	915mm	150kgs
457mm	2400kgs	1220mm	120kgs
610mm	2300kgs		
762mm	2200kgs		
915mm	2040kgs		
1066mm	1880kgs		
1220mm	1800kas		

<sup>\*</sup>Shelf Pitch - distance between shelf levels

Attach plastic feet to all 4 uprights

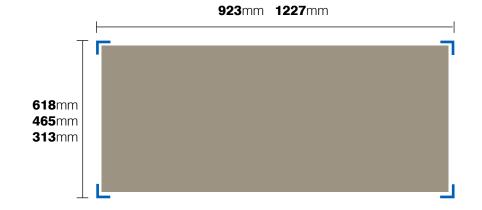

## **Tools Required**

Rubber mallet
Protective gloves
Safety shoes

<sup>\*</sup>Bay Load - based on 5 levels with the 1st level at the base